


# ფასები

მოქმედებს 23 იანვრიდან 2023

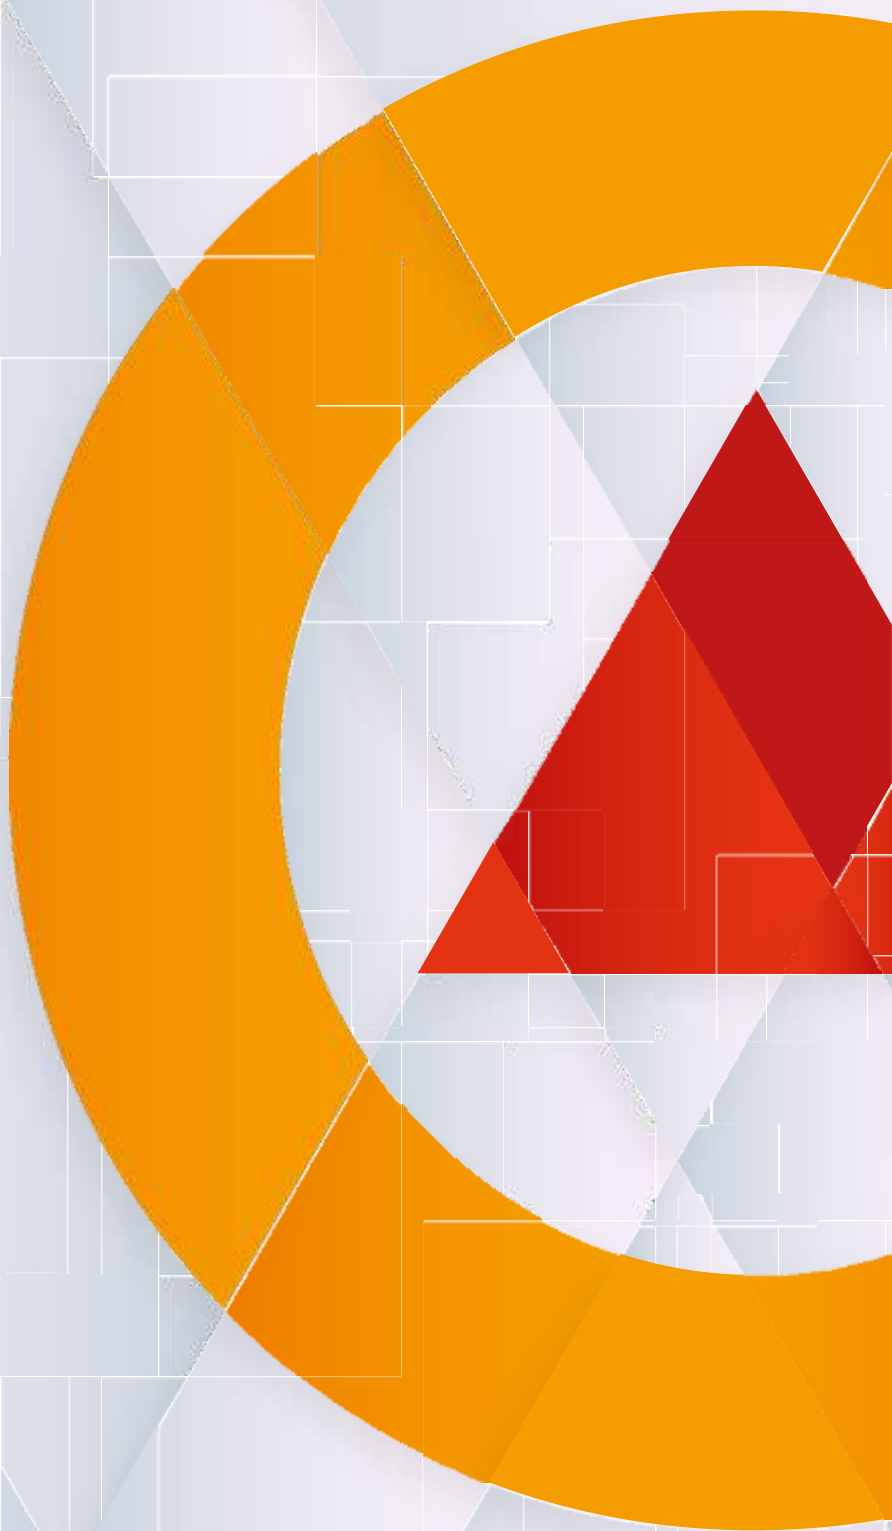

[www.variotherm.com](http://www.variotherm.com)

**VARIOTHERM**



## ModularWall-Classic MW-C

for permanently screwed wall constructions with a smooth surface.


Calculation price for 1 m<sup>2</sup> consisting of:

- ModularPanels-Classic
- incl. proportionate press-fit couplings
- incl. proportionate joint adhesive
- incl. proportionate dry wall screws

Assumed amounts for the calculated price:

- 85 % fully fitted panels
- 15 % partially fitted panels (with a variable height)



Part No.	Weight	€/m <sup>2</sup>
MW-C	20.5 kg/m <sup>2</sup>	92.00

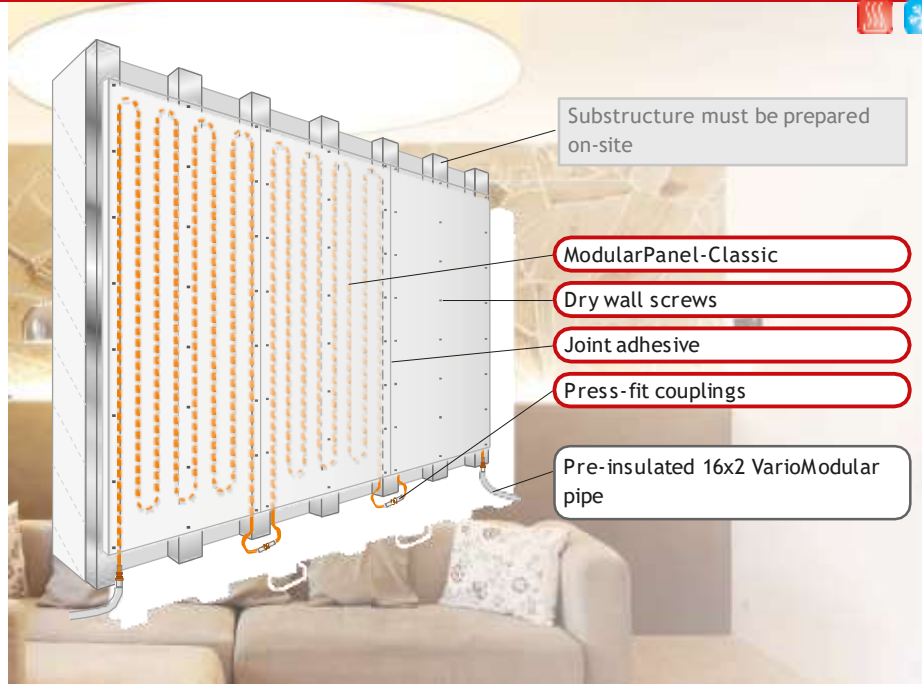


## ModularPanels-Classic

PG 020 | Special panel PG 022

- Gypsum fibre board which has been tested for their healthy building properties 18 mm
- with pre-installed VarioModular pipe 11.6x1.5 at a grid size of 75 mm
- Marking of the screwing points on the front side

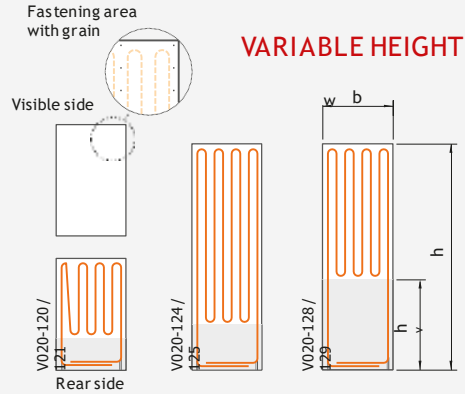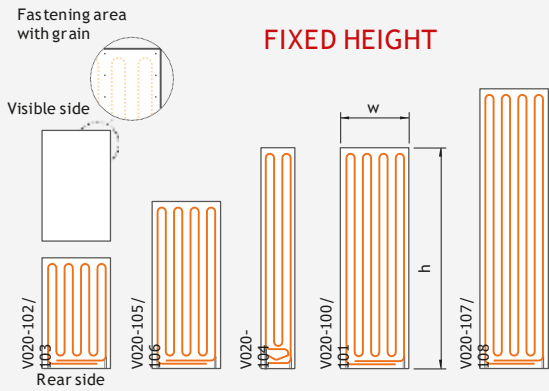

SPECIAL on request!



	Part No.	Product code	Dimension (h × w)	Height h <sub>v</sub>	Surface	Heating/Cooling area	PKU	Weight/PKU	Pallet	€/pce.
Panel width 625	V020-100	MWC-2000-625	2000 × 625 mm	-	1.25 m <sup>2</sup>	1.25 m <sup>2</sup>	1 pce.	25.5 kg	40 pcs.	103.40
	V020-102	MWC-1000-625	1000 × 625 mm	-	0.63 m <sup>2</sup>	0.63 m <sup>2</sup>	1 pce.	12.8 kg	50 pcs.	52.20
	V020-105	MWC-1500-625	1500 × 625 mm	-	0.94 m <sup>2</sup>	0.94 m <sup>2</sup>	1 pce.	19.2 kg	40 pcs.	77.90
	V020-107	MWC-2500-625	2500 × 625 mm	-	1.56 m <sup>2</sup>	1.56 m <sup>2</sup>	1 pce.	31.8 kg	40 pcs.	128.90
	V020-120	MWC-1000-625-V300	1000 × 625 mm	300 mm	0.63 m <sup>2</sup>	0.48 m <sup>2</sup>	1 pce.	13.0 kg	50 pcs.	48.90
	V020-124	MWC-2000-625-V400	2000 × 625 mm	400 mm	1.25 m <sup>2</sup>	1.04 m <sup>2</sup>	1 pce.	25.8 kg	40 pcs.	99.40
Panel width 600	V020-128	MWC-2000-625-V800	2000 × 625 mm	800 mm	1.25 m <sup>2</sup>	0.79 m <sup>2</sup>	1 pce.	26.2 kg	40 pcs.	94.00
	V020-104	MWC-2000-312	2000 × 312 mm	-	0.62 m <sup>2</sup>	0.62 m <sup>2</sup>	1 pce.	12.6 kg	80 pcs.	52.20
	V020-101	MWC-2000-600	2000 × 600 mm	-	1.20 m <sup>2</sup>	1.20 m <sup>2</sup>	1 pce.	24.5 kg	40 pcs.	102.00
	V020-103	MWC-1000-600	1000 × 600 mm	-	0.60 m <sup>2</sup>	0.60 m <sup>2</sup>	1 pce.	12.2 kg	50 pcs.	51.80
	V020-106	MWC-1500-600	1500 × 600 mm	-	0.90 m <sup>2</sup>	0.90 m <sup>2</sup>	1 pce.	19.2 kg	40 pcs.	75.50
	V020-108	MWC-2500-600	2500 × 600 mm	-	1.50 m <sup>2</sup>	1.50 m <sup>2</sup>	1 pce.	31.8 kg	40 pcs.	125.10
	V020-121	MWC-1000-600-V300	1000 × 600 mm	300 mm	0.60 m <sup>2</sup>	0.46 m <sup>2</sup>	1 pce.	12.5 kg	40 pcs.	48.20
	V020-125	MWC-2000-600-V400	2000 × 600 mm	400 mm	1.20 m <sup>2</sup>	1.00 m <sup>2</sup>	1 pce.	24.8 kg	40 pcs.	97.60
	V020-129	MWC-2000-600-V800	2000 × 600 mm	800 mm	1.20 m <sup>2</sup>	0.76 m <sup>2</sup>	1 pce.	25.1 kg	40 pcs.	92.20

PKU = packaging unit, PG = product group; all prices excluding sales tax.


## ModularBlankPanels-Classic

PG 021

to compensate for free remaining unheated areas

- Gypsum fibre board which has been tested for their healthy building properties 18 mm


Part No.	Product code	Dimension (b x h)	A [m <sup>2</sup> ]	PKU	Weight/PKU	Pallet	€/pce.
V021-100	MAC-2000-625	2000 x 625 mm	1.25	1 pce.	27.1 kg	40 pce.	28.20
V021-102	MAC-1000-625	1000 x 625 mm	0.63	1 pce.	13.6 kg	50 pce.	14.00
V021-101	MAC-2000-600	2000 x 600 mm	1.20	1 pce.	26.0 kg	40 pce.	27.00
V021-103	MAC-1000-600	1000 x 600 mm	0.60	1 pce.	13.0 kg	50 pce.	13.60



## Pre-insulated 16x2 VarioModular pipe

PG 130

- Aluminium multi-layer composite pipe 16x2 (PE-RT/AL/PE)
- No oxygen diffusion whatsoever
- 70 °C, 6 bar
- Insulation: Polyethylene soft foam
- Fire resistance as per EN 13501-1: C<sub>L</sub>-s1,d0



Part No.	Insulation thickness	PKU	Weight/PKU	€/m
V1226	6 mm	100 m roll	14.0 kg	3.42
V1227	9 mm	100 m roll	14.9 kg	3.86

## Retaining clamp ø35

WG 130

for affixing the pre-insulated VarioModular pipes.




Part No.	Variant	PKU	Weight/PKU	€/100 pcs.
V2802	single	100 pcs.	2,6 kg	34.10
V2803	double	50 pcs.	2,3 kg	56.70

## Duo adhesive

PG 021

for subsequent adhesion of ModularPanels. Breadth of assembly joints from 3 to 8 mm. 1 cartridge is sufficient for an approx. 7 m joint (with a breadth of 4 mm and a height of 18 mm). For each cartridge, we recommend 3 pieces of static mixing tube (F116).



**Caution:** Special W048 manual applicator required!


Part No.	PKU	Weight/PKU	Carton	€/PKU
F115	1 cartridge	1 kg	10 pcs.	36.20
F116	1 static mixing tube	15 g	75 pcs.	2.50

## Press-fit couplings

PG 100

TH press-fit contour, incl. galvanic isolation, visual monitoring of insertion depth, tested as per EN 21003, suitable REMS press-fitting jaws: page 44


Part No.	Type	Press-fit contour	PKU	Weight/PKU	€/pce.
Z1320	Straight 16 x 16	TH16	1 pce.	50 g	7.02
Z1610	Straight 16 x 11.6	TH16 & TH11.6	1 pce.	45 g	7.02
Z1600	Straight 11.6 x 11.6	TH11.6	1 pce.	30 g	7.02
Z1370	Elbow 90° 16 x 16	TH16	1 pce.	50 g	8.36
Z1620	Elbow 90° 16 x 11.6	TH16 & TH11.6	1 pce.	45 g	8.36
Z1630	Elbow 90° 11.6 x 11.6	TH11.6	1 pce.	45 g	8.36

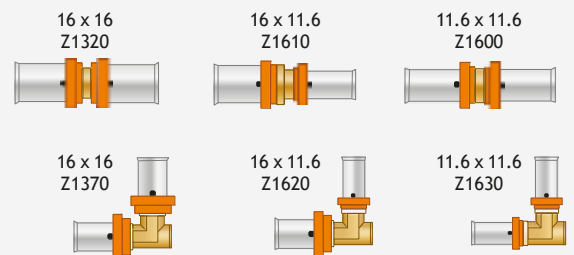

## Cold shrink tape

PG 031

For optimum corrosion resistance of press-fit coupling connections as per ÖN H 5155  
Roll: 50 mm x 15 m, 1 roll is sufficient for approx. 35 press-fit coupling connections (with a 50 % overlap)



Part No.	PKU	Weight/PKU	Carton	€/pce.
Z1699	1 pce.	990 g	20 pcs.	23.43

## Greenline joint adhesive

PG 021

for connecting the blunt adjoining ModularPanels,  
1 cartridge (310 ml) sufficient for 7 m<sup>2</sup>



Part No.	PKU	Weight/PKU	Carton	€/cartridge
F111	1 cartridge	550 g	25 cartridges	21.30

## Dry wall screws 3.9 x 40 mm

PG 021

for joining ModularPanels to wooden/metal structures, optimum shank length, incl. associated bit. Consumption: 22 pcs./m<sup>2</sup>



Part No.	PKU	Weight/PKU	€/100 pcs.
F120-0250	Carton at 250 pcs.	0.6 kg	2.92
F120-1000	Carton at 1000 pcs.	2.4 kg	2.92

## Adhesive tape

PG 031

As a separating layer to joint surfaces or between the panel contact points and the substructure, if required. Roll: 50 mm x 66 m



Part No.	PKU	Weight/PKU	Carton	€/pce.
V288	1 pce.	210 g	36 pce.	6.41

## Duo manual applicator

PG 140

The matching manual applicator for applying the Duo adhesive.



Part No.	PKU	Weight/PKU	€/pce.
W048	1 pce.	1.4 kg	169.20

## Planning and installation instructions

PG 112

The respectively valid planning and installation instructions are part of our warranty and guarantee.


Part No.	PKU	Language	€/pce.
VBOOK6	1 pce.	German	--
VBOOK6E	1 pce.	English	--



Accessories: see pages 36 to 45. Please be sure to allow for the necessary trimming on site when ordering materials (based on experience, approx. 5 % is usual for ModularWall), please also check the packaging units and accessories you require (heating/cooling distribution manifold, pipe locator, room thermostats ...).

PKU = packaging unit, PG = product group; all prices excluding sales tax.

## Certificates:



## GREENCLIMAT

დემეტრე თავდადებულის N-26  
დიდი დილომი  
თბილისი

მობ: 00995-595121265

[info@greenclimat.co.uk](mailto:info@greenclimat.co.uk)

[www.greenclimat.co.uk](http://www.greenclimat.co.uk)